

# EG-M72-HD/BF-DG MONOCRYSTALLINE 144-CELL MODULE BIFACIAL

380 ~ 400Wp

1500V DC

0~+3% POSITIVE TOLERANCE



## KEY FEATURES



### Half cell design

The HC design 144-cell brings lower cell connection loss and lower thermal coefficients at high operation temperatures



### High Efficiency

Leading PERC technology achieves higher module efficiency up to frontside 19.54% and 23.45% with backside 20% power boost



### Excellent Low-light Performance

Advanced solar cell surface texturing technology allows for excellent performance in low-light environments.



### High Reliability

0.5% annual degradation. Strict in-house testing in Lab which CNAS & VDE certified to ensure the 30year linear power warranty




### Highly Strengthened Design

Framed Double Glass design. Certified to withstand: 5400Pa snow load and 2400Pa wind load



### PID Resistant

PID issue is resolved by unique structural design

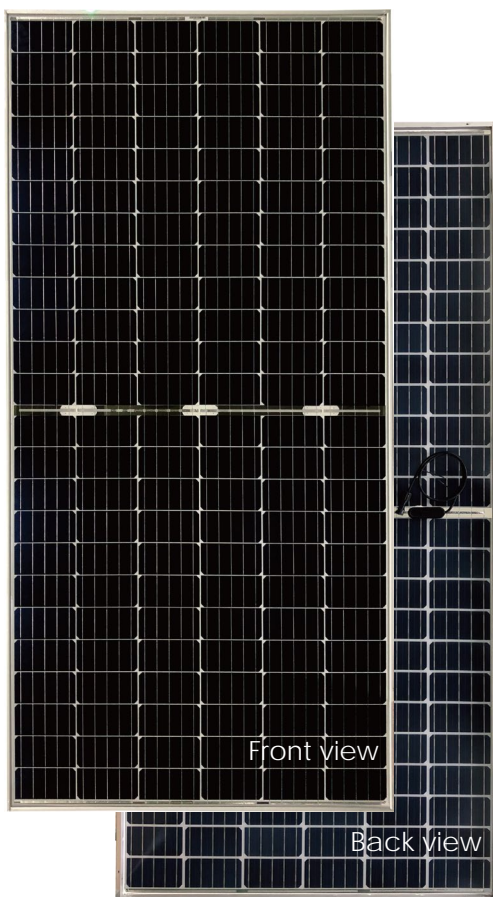

Front view

Back view


\* Black Frames Applied



5 Bus Bar Solar CELL

## LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty · 30 Year Linear Power Warranty

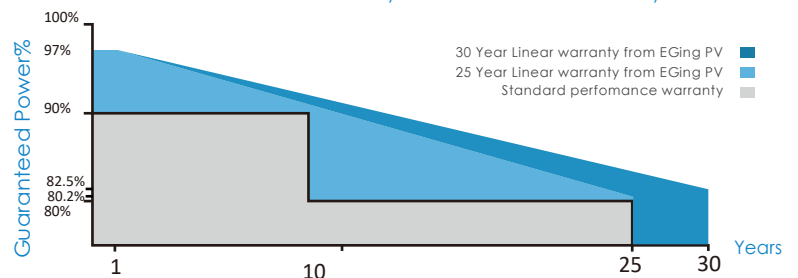

Add: No.18, Jinwu Road, Jintan Dist. Changzhou City, Jiangsu Province, P.R.C  
 Tel: +86-519-8258 8808 · Web: www.egingpv.com  
 Fax: +86-519-8258 1868 · E-mail: eging@eging.com

